


Micromotors CX.KR300

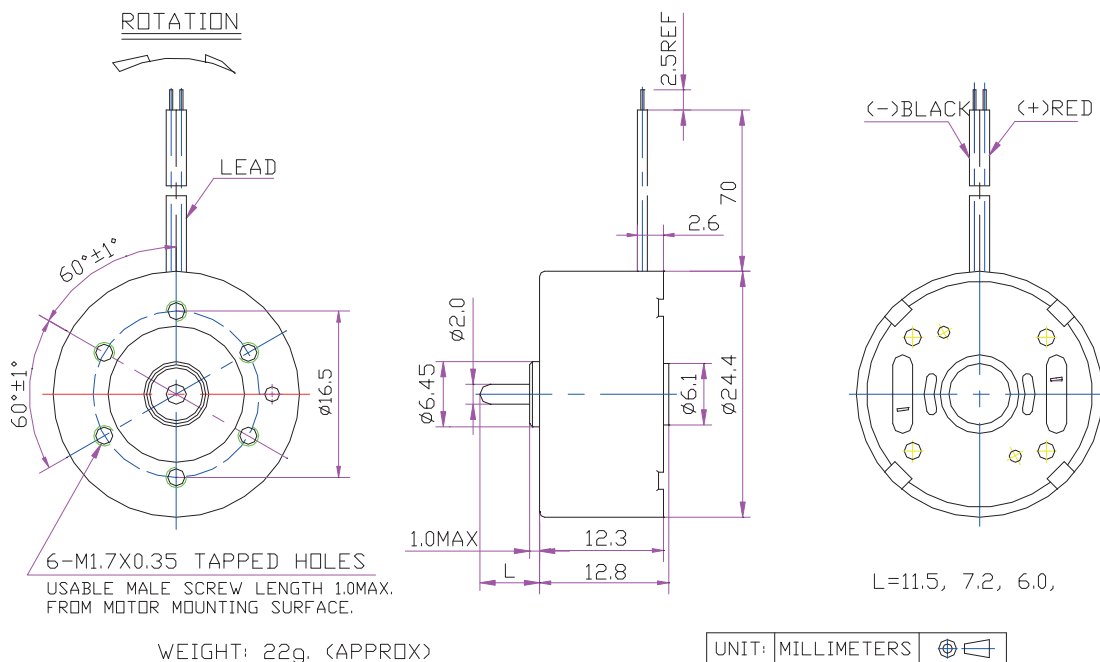

WEIGHT: 22g. (APPROX)

Precious Metal-brush Motor

Model	Voltage		No Load		At Maximum Efficiency					Stall	
	Operating Voltage	Nominal (Constant)	Speed rpm	Current A	Speed rpm	Current A	Torque g-cm	Output W	Eff. %	Torque g-cm	Current A
CX.KR300-15200	0.5-3.0	0.9	2300	0.045	1669	0.132	2.74	0.05	39.4	10	0.35
CX.KR300-15200	0.5-3.0	3.0	7520	0.055	6059	0.21	6.02	0.38	60.2	31	0.86
CX.KR300-14270	0.8-4.5	1.5	2680	0.03	2070	0.102	3.06	0.07	42.3	13.5	0.34
CX.KR300-14270	0.8-4.5	3.0	5600	0.05	4384	0.18	5.86	0.26	48.7	27	0.65
CX.KR300-13300	1.5-6.0	6.0	10500	0.06	8506	0.213	8.74	0.76	59.5	46	0.91
CX.KR300-12350	0.7-5.0	4.0	5950	0.035	4664	0.127	5.84	0.28	55.0	27	0.465
CX.KR300-11400	0.7-5.0	2.5	3200	0.022	2431	0.070	3.60	0.09	51.7	15	0.225
CX.KR300-11400	0.7-5.0	3.0	3850	0.023	2980	0.079	4.01	0.12	52.6	18	0.27
CX.KR300-10440	1.0-5.0	3.0	3200	0.022	2450	0.070	3.57	0.09	42.3	15	0.22
CX.KR300-10500	1.0-6.0	5.0	5650	0.030	4341	0.099	5.56	0.25	49.8	24	0.33
CX.KR300-09580	1.5-9.0	3.0	2700	0.015	2015	0.044	3.04	0.06	47.5	12	0.12
CX.KR300-09580	1.5-9.0	5.0	4300	0.019	3323	0.065	4.77	0.16	50.3	21	0.22
CX.KR300-09580	1.5-9.0	8.0	6850	0.029	5284	0.098	7.09	0.38	49.1	31	0.33
CX.KR300-08640	1.2-9.0	4.5	3600	0.017	2665	0.048	3.51	0.10	44.0	13.5	0.14
General Test Tolerance			± 15%								