
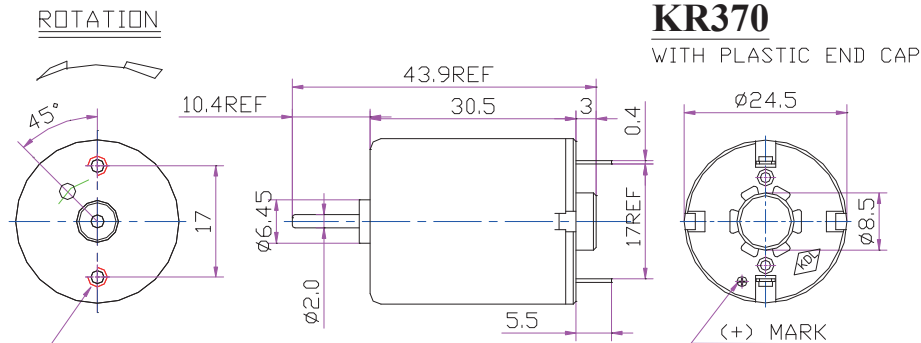


Micromotors

CX.KR370H - CX.KR370

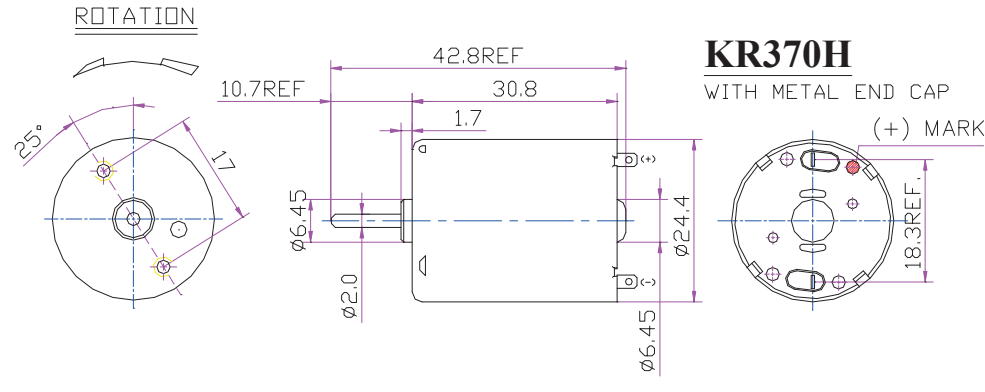

2-M3.0 TAPPED HOLES
USABLE MALE SCREW LENGTH 2.5MAX.
FROM MOTOR MOUNTING SURFACE.

WEIGHT: 49g. (APPROX)

UNIT: MILLIMETERS

Precious Metal-brush Motor

Model	Voltage		No Load		At Maximum Efficiency					Stall	
	Operating Voltage	Nominal (Constant)	Speed rpm	Current A	Speed rpm	Current A	Torque g-cm	Output W	Eff. %	Torque g-cm	Current A
CX.KR370H-22170	1.5-6.0	6.0	6000	0.055	5255	0.363	22.32	1.311	60.1	185	2.40
CX.KR370H-17315	2.4-9.0	6.0	3250	0.035	2688	0.167	19.89	0.548	54.6	115	0.80
CX.KR370H-17315	2.4-9.0	9.0	4900	0.040	4150	0.419	27.02	1.148	58.2	175	4.39
CX.KR370H-15370	3.0-13.5	12.0	5500	0.028	4712	0.167	25.80	1.247	62.1	180	1.00
CX.KR370H-12560	4.0-13.5	12.0	3700	0.020	3067	0.097	21.89	0.689	59.2	128	0.47
CX.KR370H-11670	6.0-14.0	12.0	3060	0.016	2501	0.072	20.10	0.516	60.0	110	0.33
CX.KR370-11640	4.0-15.0	13.0	3250	0.015	2705	0.074	20.95	0.581	60.0	125	0.37
CX.KR370-11660A	4.0-15.0	11.0	2800	0.014	2316	0.067	19.37	0.460	62.5	112	0.32
CX.KR370-10750	6.0-18.0	13.0	2800	0.013	2284	0.058	18.42	0.432	57.7	100	0.26
CX.KR370-08780	6.0-30.0	12.0	2500	0.010	1994	0.039	13.17	0.269	57.0	65	0.15
CX.KR370-08780	6.0-30.0	24.0	5100	0.015	4180	0.068	24.34	1.044	63.8	135	0.31
General Test Tolerance					± 15%						