

Telescopic Actuator CX.FD Standard Series

Feature:

Input Voltage: 12Vdc / 24Vdc
Max Load: 6000N (push) / 4000N (pull)
Max Speed: 16.6mm/sec
Stroke: 50, 100, 150, 200, 250, 300mm
Duty cycle: 10% or 2min continuous operation in 20 min
IP protection Level: IP43
Color: Aluminum grey
Low Noise Level
Preset Limit Switches




Option:

Hall effect sensor
Manual Drive by Hand Crank
Control Box

Electric Performance:

Model	Gear ratio	Voltage	Speed @ No Load	Max Push	Max Pull	Speed @ Max Load
		<i>Volt</i>	<i>mm/sec</i>	<i>N</i>	<i>N</i>	<i>mm/sec</i>
CX.FD-A4		12.0	4.2	6000	4000	3.9
		24.0				
CX.FD-A6		12.0	6.2	3000	2000	4.4
		24.0				
CX.FD-A8		12.0	8.2	2500	1500	5.3
		24.0				

Speed vs Load

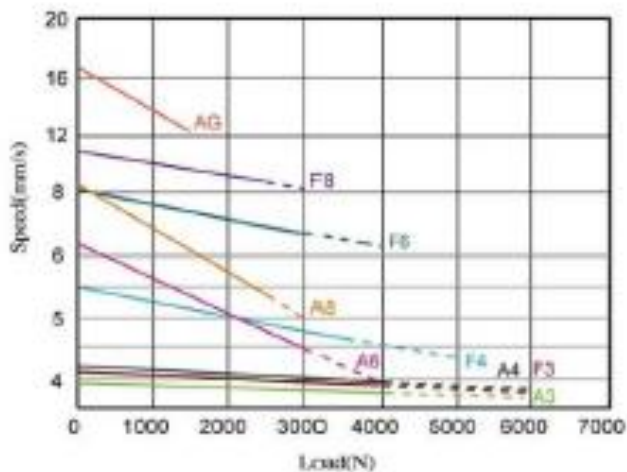

Current vs Load

