


Micromotors

CX.KC365 Series

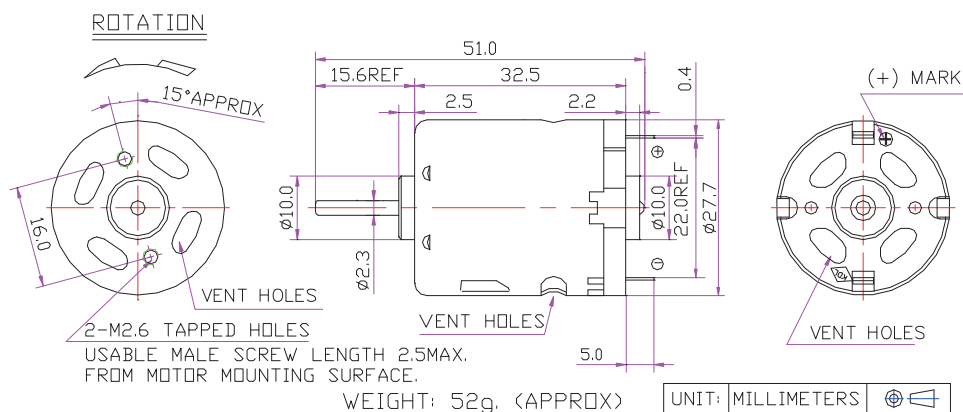

PMDC Carbon-brush Motor (KC365SH type with metal end-cap is also available)

Model	Voltage		No Load		At Maximum Efficiency					Stall	
	Operating Voltage	Nominal (Constant)	Speed Rpm	Current A	Speed rpm	Current A	Torque g-cm	Output W	Eff. %	Torque g-cm	Current A
CX.KC365S-3133	4.5-9.0	4.5	11500	0.45	9213	1.81	47.7	4.51	55.3	240	7.3
CX.KC365S-3133	4.5-9.0	6.0	15500	0.45	12800	2.12	59.5	7.80	61.3	340	10.0
CX.KC365S-2842	6.0-14.5	13.5	28100	0.50	23376	2.47	87.4	20.96	62.8	520	12.4
CX.KC365H-2557	6.0-13.5	12.0	23600	0.31	19356	1.41	49.45	9.82	57.9	275	6.45
CX.KC365S-2547	6.0-13.5	13.5	25000	0.43	20453	1.91	72.75	15.26	59.1	400	8.8
CX.KC365S-2080	4.5-24.0	12.0	12800	0.25	10265	1.01	65.35	6.88	56.6	330	4.1
CX.KC365S-1980	9.0-24.0	24.0	25300	0.30	20708	1.35	95.29	20.24	62.3	525	6.1
CX.KC365S-1885T	6.0-20.0	12.0	12300	0.20	9759	0.77	51.65	5.17	56.1	250	2.95
CX.KC365S-1885T	6.0-20.0	18.0	18800	0.21	15351	0.94	66.05	10.40	61.8	360	4.3
CX.KC365S-15120	6.0-30.0	12.0	8000	0.12	6280	0.44	43.0	2.77	52.7	200	1.6
CX.KC365S-15120	9.0-30.0	24.0	16500	0.16	13485	0.72	69.4	9.60	55.9	380	3.2
CX.KC365S-14140	9.0-30.0	24.0	14500	0.12	11700	0.502	62.70	7.53	62.5	325	2.1
CX.KC365S-12180	9.0-32.0	30.0	14200	0.10	11360	0.40	57.00	6.64	55.3	285	1.6
CX.KC365SH-10210	9.0-30.0	12.0	4300	0.05	3216	0.15	25.2	0.83	46.7	100	0.44
CX.KC365S-10210	9.0-30.0	24.0	11000	0.085	8517	0.29	40.63	3.55	50.7	180	1.0
CX.KC365S-10250	12.0-30.0	12.0	4100	0.05	3009	0.14	22.63	0.70	42.2	85	0.38
CX.KC365S-10250	12.0-30.0	24.0	8100	0.07	6150	0.22	42.04	2.65	50.0	175	0.7
CX.KC365SH-10250	9.0-30.0	24.0	7750	0.07	5908	0.22	46.4	2.81	52.1	195	0.72
General Test Tolerance			± 15%								